

# LI-ION BATTERY

## LC18500+PC

### RECHARGEABLE BATTERY

SPECIFICATIONS		
Typical Capacity	1400 mAh	
Minimum Capacity*1	1320 mAh	
Nominal Voltage	3,7 V	
Voltage Range	3.0 to 4.2V	
Discharge Condition	Max. Current	2C mA
	Cut-off Voltage	3.0V
AC Impedance(mOHM)	< 70 at 1KHz	
Operating Temp	Storage	-20°C ~ 60°C
	Charge	0°C ~ 45°C
	Discharge	-20°C ~ 60°C
Energy Density	Volumetric	471 Wh/l
	Gravimetric	160 Wh/kg



\* The tube design in the photo is for visual purpose only

\*1.Nominal Capacity: 23±3°C, 0.2C, 2.75V cutoff Discharge Capacity

MECHANICAL DATA	
Diameter	18,0 mm
Height	50,0 mm
Weight	33,0 ± 0.5g


CHARGING			
Charge Condition	Charge Method	CC/CV	
	Max. Current	1.0CmA (1400mA)	
	Voltage	4.2 ± 0.03V	
	Charge battery in a temperature range of 0°C to +45°C. Maximum charge rate at C rate, charge battery at a constant current until 4.2V ± 0.03V per cell is attained. Hold at 4.2V per cell until current declines to C/10. Then cut off charge voltage.		
Approx. Charging time	C rate		2 ~ 3 hours
	C/2		3 ~ 4 hours
	C/5		6 ~ 7 hours

Never charge batteries unattended. It's recommended to use a fireproof container.


# LC18500+PC

## RECHARGEABLE BATTERY

PROTECTION CIRCUIT MODULE	
Overcharge Voltage	4.35 ± 0.03V
Overdischarge Voltage	2.30 ± 0.1V
Overcurrent	3 ± 1 A
Short Protection	Cut short circuit





ITEM		CRITERION	REMARKS
C-rate characteristics	0.2C	100%	Test Temperature: 23±3°C Charge: 0.5C, CC/CV, 4.2V, C/20 end Discharge: Each Rate, CC, 3.0V
	1C	≥98%	
Temperature Dependence of Capacity	60°C	≥95%	Percentage of 23±3°C capacity is 100% -On the standing setting temperature, cell state is full-charge(4.2V). -Measured with discharge current 0.5CmA with 3.0V. -Interval for temperature's change is 2Hrs.
	45°C	≥97%	
	23°C	1	
	0°C	≥90%	
	-10°C	≥70%	
Cycle Life Characteristics		≥500cycles	More than 80% of initial capacity Charge: 0.5C, CC/CV, 4.2V, C/20 end Discharge: 0.2C, CC, 3.0V
Storage Characteristics (Recovery Capacity)	6 Month at 23°C	≥90%	On a storage, Cell state is 40%~60% charge(3.7~3.9V)
	3 Month at 45°C	≥80%	
	1 Month at 60°C	≥80%	

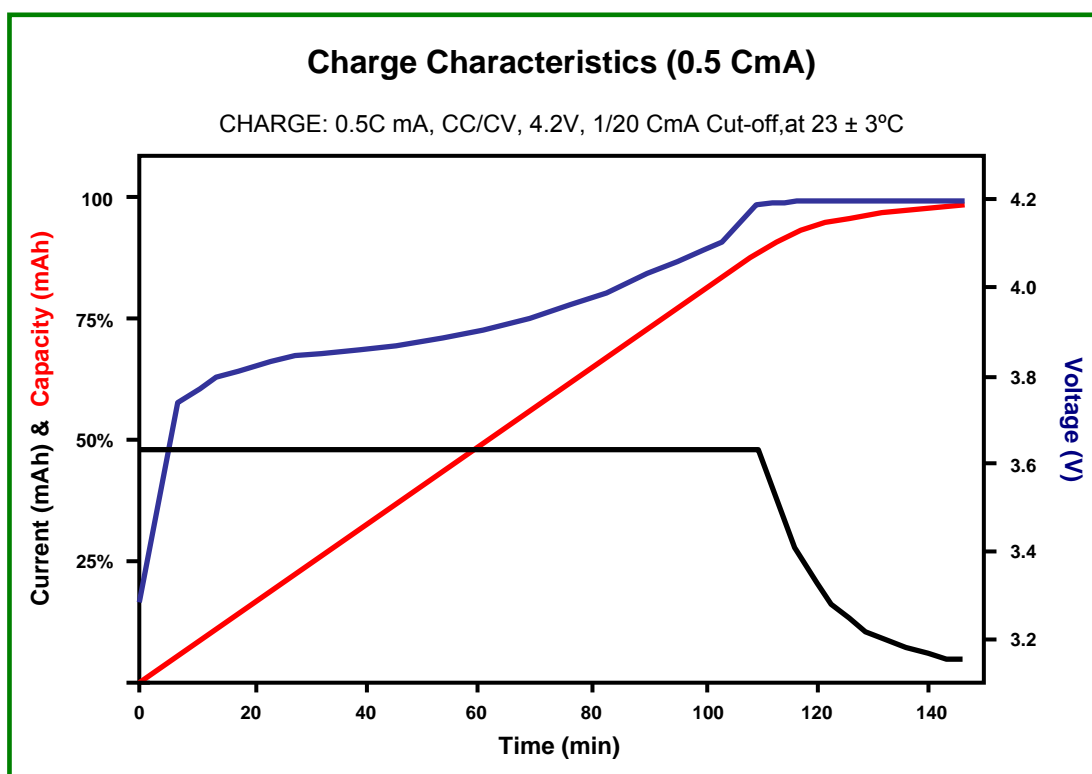

# LC18500+PC

## RECHARGEABLE BATTERY

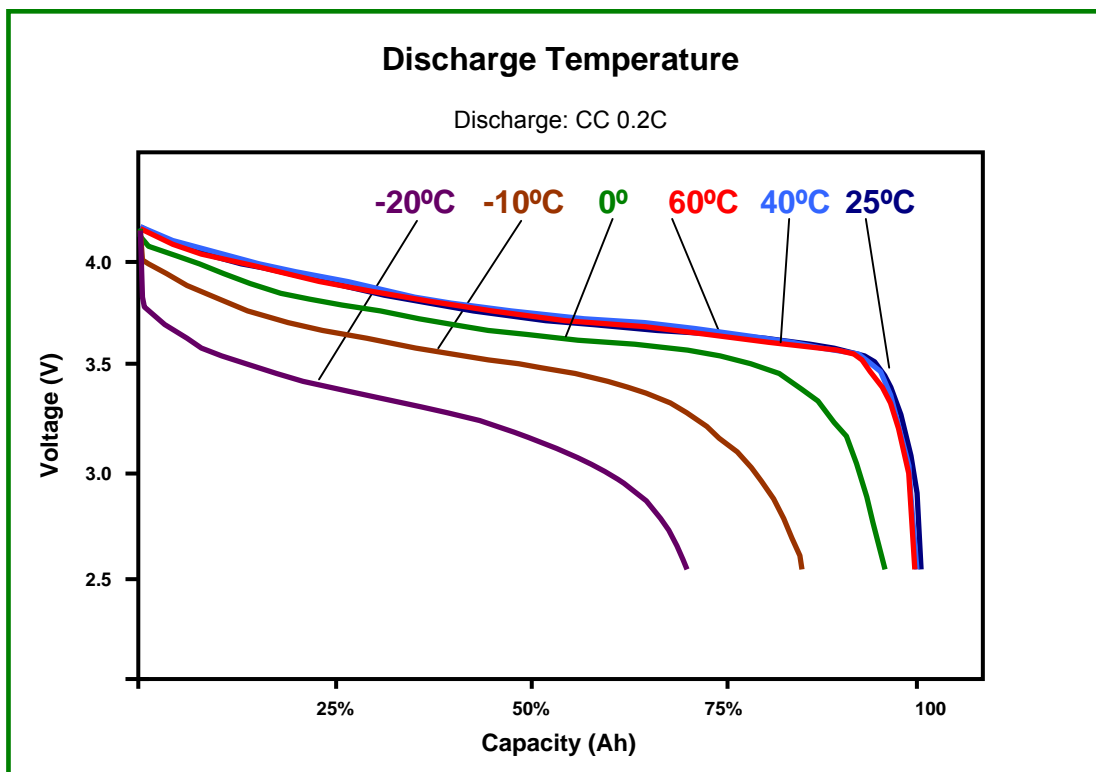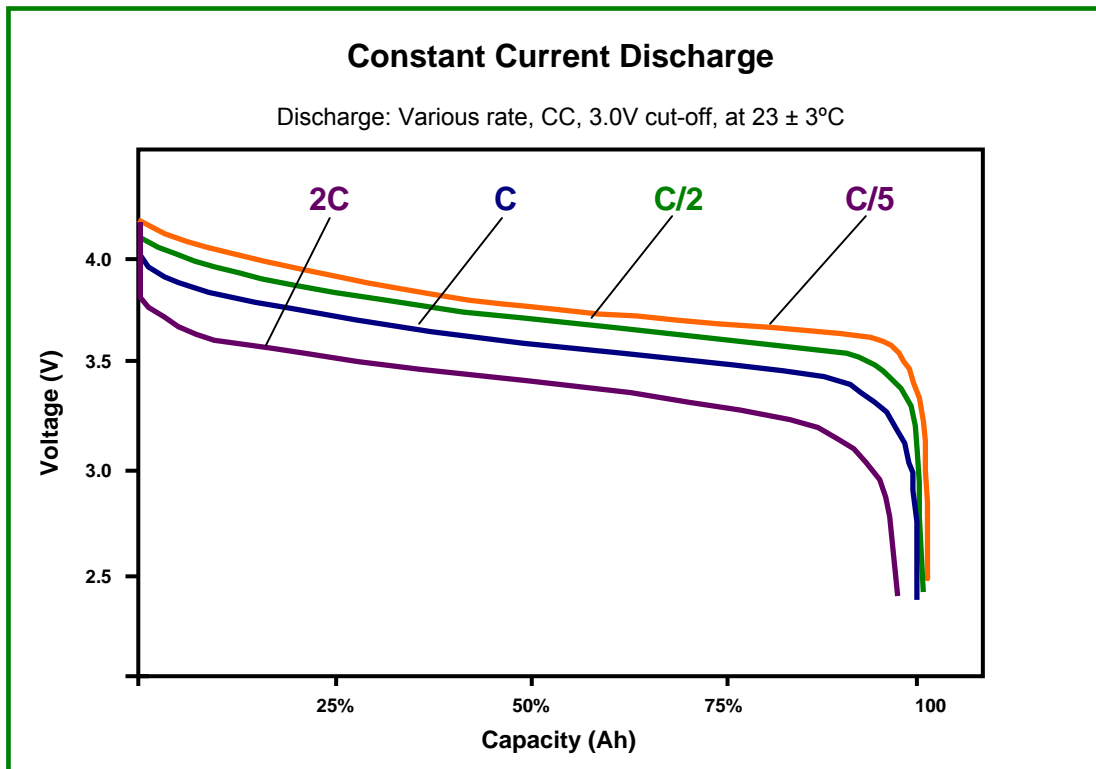

# LC18500+PC

## RECHARGEABLE BATTERY

### **! Danger**

- “Do not disassemble or reconstruct battery”
- “Do not short-circuit battery”
- “Do not use or leave battery nearby fire, stove or heated place (>80°C)”
- “Do not immerse the battery in water or sea water , or get it wet”
- “Do not charge battery nearby the fire or under the blazing sun”
- “Do use the specified charger and observe charging requirement”
- “Never charge batteries unattended”
- “Put battery in the fireproof container, charge in an isolated area, away from other flammable materials. Always have fire extinguisher for emergency use”
- “Do not use the battery with conspicuous damage or deformation”
- “Do not make the direct soldering on battery”
- “Do not reverse charge or overdischarge the cell”
- “Do not connect battery to the plug socket or car-cigarette-plug”
- “Do not use battery for unspecified equipment”
- “Do not touch a leaked battery directly”

### **! Warning**

- “Do not use Lithium ion battery in mixture”
- “Keep the battery away from babies”
- “Do not continue to charge battery over specified time”
- “Do not get into a microwave or a high pressure container”
- “Do not use a leaked battery nearby fire”
- “Do not use an abnormal battery”